

# Nail Tag

## UNIQUE NAIL-SHAPED RFID TAG EASILY HAMMERS INTO WOOD

- **Fast, secure installation** – tags are easily driven into place, and are nearly impossible to remove
- **Rugged reliability** – high resistance to moisture, thermal fluctuation, vibration and shock
- **Unsurpassed quality** – fully automated HID manufacturing and direct-bonding technology ensure dependable performance



The Nail Tag transponder makes tagging wood and other solid materials as easy as hitting a nail on the head. It is just one of many specialized radio frequency identification (RFID) tagging solutions available from HID Global. These tags are built for rugged treatment, featuring high resistance to moisture, vibration and shock.

A durable fiberglass housing protects embedded electronics during installation and use. The nail shape holds each tag securely in place. A standard drill hole allows the Nail Tag transponder to be mounted into dense materials.

Nail Tag transponders install quickly and securely into pallets and containers, enabling accurate real-time tracking, supplying organizations the data needed to optimize industrial processes, workflow and inventory management.

Nail Tag devices are also used in forestry and research applications to tag living trees. Moisture resistance and stable performance across fluctuating temperatures ensure long-term performance.

The Nail Tag transponder is available with a standard low-frequency integrated chip containing a unique electronic identification number.

Custom integrated chip options are also available to match application requirements for processing speed and memory capacity.




### TECHNOLOGY HIGHLIGHTS:

- Low frequency, 125 kHz
- 128 bit read-only memory
- High resistance to moisture (IP67) and temperature fluctuation
- ISO 17364

For more information, contact  
[tagsales@hidglobal.com](mailto:tagsales@hidglobal.com)

# Nail Tag

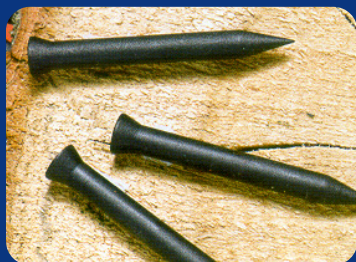

HID can create a custom tag solution to fit your application requirements for chip type, dimensions, programming and materials.

## APPLICATION AREAS:

- Asset tracking and logistics
  - High value construction supplies

## NAIL TAG

Base Model Number	684910-001
	<b>ELECTRONIC</b>
Operating Frequency	125 kHz ± 6
Chip Type	FDX-B BDE
Memory	128 bit read-only
	<b>PHYSICAL</b>
Dimensions	Ø 0.16 x 1.40 in (Ø 4 x 35.5 mm)
Mounting Method	Hammer*
Affixes To	Wood
Housing Material	Polyamid and fiberglass
Color	Black
	<b>CHEMICAL AND MECHANICAL</b>
Water	IP67, 68° F (20° C), 3.3 ft (1 m) x 1 h
Vibration	IEC 68.2.6 [10 g, 10 to 2000 Hz, 3 axis, 2.5 h]
Shock	IEC 68.2.29 [40 g, 18 ms, 6 axis, 2000 times]
	<b>THERMAL</b>
Storage	-13° to +185° F (-25° to +85° C), 1000 h
Operating	-13° to +185° F (-25° to +85° C)
	<b>OTHER</b>
Standards	ISO 17364
Box Size	2.000 pcs
Warranty	2 Years

\* Some materials, including hardwoods, may require a hole be drilled prior to tag insertion. Removal of tag for re-use may damage transponder.



hidglobal.com

North America: +1 512 776 9000 | Toll Free: 1 800 237 7769

Europe, Middle East, Africa: +44 1440 714 850

Asia Pacific: +852 3160 9800 | Latin America: +52 (55) 9171-1108

For more global phone numbers click here

© 2022 HID Global Corporation/ASSA ABLOY AB. All rights reserved.

2022-02-20-hid-rfid-il-nail-tag-ds-en

PLT-00281

Part of ASSA ABLOY